


MONTAGEANLEITUNG
ASSEMBLY INSTRUCTIONS




CABsea)

Verfügbare Rahmengrößen
Available frame sizes

CABsea) F4



CABsea) F4




CABsea) F4

CABsea) F10



CABsea) F10



CABsea) F10

CABsea) F16



CABsea) F16



CABsea) F16




CABsea) F16



CABsea) F16

CABsea) F24



CABsea) F24



CABsea) F24



CABsea) F24




CABsea) F24


Ausbruchmaße / Bohrbilder

Cutout dimensions / Drilling pattern


CABsea) F4




CABsea) F10




CABsea) F16




CABsea) F24

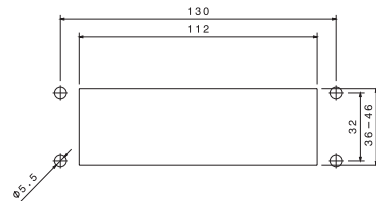


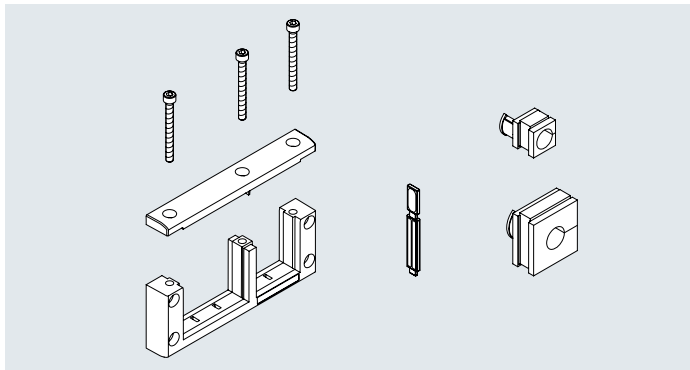


1

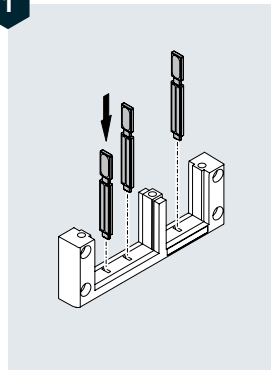


2

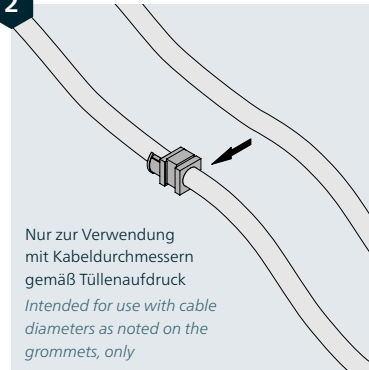


3

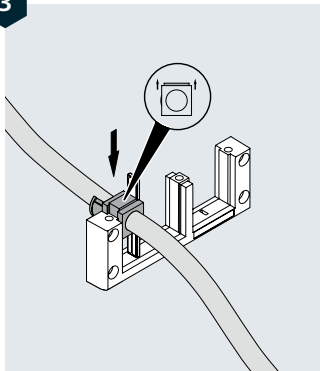


4


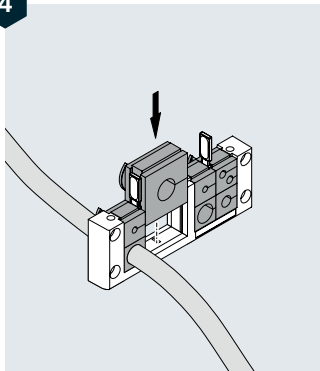


5

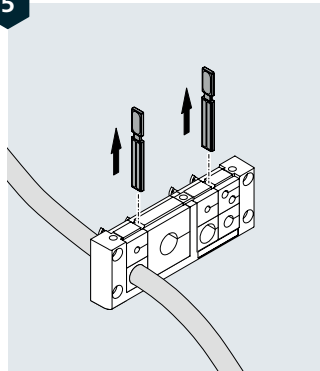

6

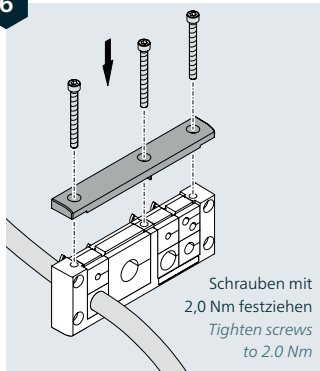

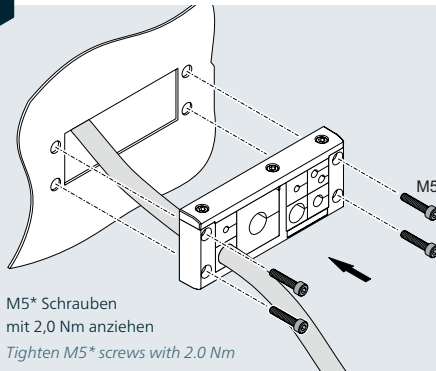7

8


M5* Schrauben
mit 2,0 Nm anziehen
Tighten M5 screws with 2.0 Nm*

* Bei UL Type 5 sind Schrauben aus rostfreiem oder verzinktem Stahl zu verwenden.

Für die Verwendung in Innenräumen des Typs 4X müssen die Schrauben aus rostfreiem Stahl AISI Typ 304 oder 316 hergestellt sein.

* For UL Type 5, screws shall be made of stainless steel or galvanized steel.

For Type 4X indoor use, screws shall be made of stainless steel AISI Type 304 or 316.

i

Die Evaluierung der UL-Schutzklassen erfolgte mit gerade durchgeführten Kabeln ohne Biegungen oder einwirkende Versatzkräfte. Die ordnungsgemäße Montage für die Endanwendung ist dementsprechend auszuführen. Zug- und Rückschubentlastung der Kabel sind in der Endanwendung einzubringen.

UL Type ratings were evaluated with cables feed straight through, without any bending or misalignment forces on the same. This shall be considered for proper end use mounting. Strain relief and push back relief on cables shall be up to the end user to provide it in the end use.

PFLITSCH GmbH & Co. KG

Ernst-Pflitsch-Straße 1 · 42499 Hückeswagen · Germany

T +49 2192 911-0 · info@pflitsch.de · www.pflitsch.de

Irrtümer und technische Änderungen vorbehalten. | *Errors and technical alterations are reserved.*

Montageanleitung CABseal | 08.2023 | 152598+